



Cyclo Industries, Inc

401 Maplewood Dr • Jupiter, FL 33458 • 561-775-9600

TECHNICAL DATA SHEET

High Temperature Threadlocker-Red

C-27250

PRODUCT DESCRIPTION

Cyclo® High Temperature Threadlocker-Red is a **high temperature, high strength** anaerobic threadlocking material, which cures between engaged threads to form a unitized assembly that helps resist leakage, shock and vibration. The product is a one component, anaerobic liquid that cures when confined in the absence of air between close fitting metal surfaces. Ideal for all 3/8 inch to 1 1/2 inch diameter nut and bolt assemblies. Excellent chemical resistance and temperature resistance range of -54°C to +232°C (-65°F to +450°F).

PRODUCT BENEFITS

Improved Reliability

- Eliminates vibration issues
- Seals against leakage
- Prevents rusting of threads
- Cures without cracking or shrinking
- Resists dripping from threads during assembly
- Performs at elevated temperatures

Easy Application

- No mixing
- No curing outside of joint
- No on-torque adjustments needed

TYPICAL APPLICATIONS

Prevents loosening and leakage of threaded fasteners.

Particularly suitable for applications such as:

- Frame brackets
- Hydraulic press studs
- Idler Bearings
- Shock absorber mounts
- Frame bolts
- Ring gear bolts
- Axle support studs
- Studs in wheel hub
- Flywheel bolts

DIRECTIONS FOR USE

For assembly

1. Clean all threads (Bolt and Hole) with a cleaning solvent such as a compliant Cyclo® Brake and Parts Cleaner and allow to dry.
2. Determine if the threads to be bonded are **Active** or **Inactive Metals**. If material is an **Inactive Metal**, spray all threads with an activator- Cyclo® C-930 Surface Preparation and allow 30 seconds to dry. Priming is not required if the material is an **Active Metal**. If unknown, it's always best to use the activator.
3. Shake the product thoroughly before use.
4. To prevent the product from clogging in the nozzle, do not allow the tip to touch metal surfaces during application.
5. **For Thru Holes**, apply several drops of product onto the

bolt at the nut engagement area.

6. **For Blind Holes**, also apply several drops down the female threads into the bottom of the hole. As threads are engaged, compressed air forces the product upwards into the threads.

7. Assemble and tighten as usual. When tightening to established torque values, torque compensation is not required.

For Cleanup

1. Residual liquid films and/or fillets outside the joint are readily soluble in compliant Cyclo® Brake and Parts Cleaner.
2. Cured product can be removed with a combination of soaking in Cyclo® Gasket Remover and mechanical abrasion such as a wire brush.

For Disassembly

1. Apply localized heat to nut or bolt to approximately 260°C (500°F). Disassemble while hot.

For Reassembly

1. Remove loose product from nut and bolt.
2. Apply primer to all threads, regardless of metal type.
3. Assemble and tighten as usual.

PROPERTIES OF UNCURED MATERIAL

	Typical Value
Appearance	Opaque Red-Orange Liquid
Specific Gravity	1.11
Viscosity @ 25 C, mPa.s (cP)	4,000 to 15,000
Flash Point (TCC), C (F)	>93 (200)

PERFORMANCE OF CURED MATERIAL

(After 24 hr at 72_F on 3/8-16 steel Grade 8 Nuts and Grade 5 bolts)

	Typical Value	Range
Breakaway Torque, Nm,	24	18 to 28
(in.lbs)	(213)	(160 to 250)
Prevail Torque, Nm	26	20 to 31
(in.lbs)	(230)	(180 to 270)

Where Breakaway Torque is the force required to initiate the fastener movement and Prevail Torque is the force required to disassemble the fastener once Breakaway Torque has occurred.

TYPICAL CURING PERFORMANCE

Cure speed vs. substrate

The rate of cure will depend on the material used. Cyclo® High Temperature Threadlocker-Red will react faster and stronger with **Active Metals**. However, **Inactive Metals** will require the use of an activator (Cyclo® C-930 Surface Preparation) to obtain maximum strength and cure speed at room temperature.

Active Metals	Inactive Metals
Soft Steel Iron	Bright Platings
Copper	Anodized Surfaces
Brass	Titanium
Manganese	Zinc

DISCLAIMER: Cyclo Industries, Inc. provides the information contained herein in good faith but makes no representation as to its comprehensiveness or accuracy. Individuals receiving this information must exercise their independent judgment in determining its appropriateness for a particular purpose. Cyclo Industries, Inc. makes no representations or warranties, either expressed or implied, of merchantability, fitness for a particular purpose with respect to the information set forth herein or to the product to which the information refers. Accordingly, Cyclo Industries, Inc. will not be responsible for damages resulting from use of or reliance upon this information.



Cyclo Industries, Inc

401 Maplewood Dr • Jupiter, FL 33458 • 561-775-9600

TECHNICAL DATA SHEET

High Temperature Threadlocker-Red

C-27250


Bronze Pure Aluminum
Nickel Stainless Steel
Aluminum Alloy Cadmium

The graph below shows the breakaway strength developed with time on 3/8" - 16 Grade 5 bolts and Grade 8 nuts compared to different materials.

Temperature Resistance

Product temperature range from -54°C to +232°C (-65°F to +450°F). The breakaway and prevailing torque values decrease as temperature increases, however the assembly remains effective against vibration and leakage.

Cure Speed vs Substrate

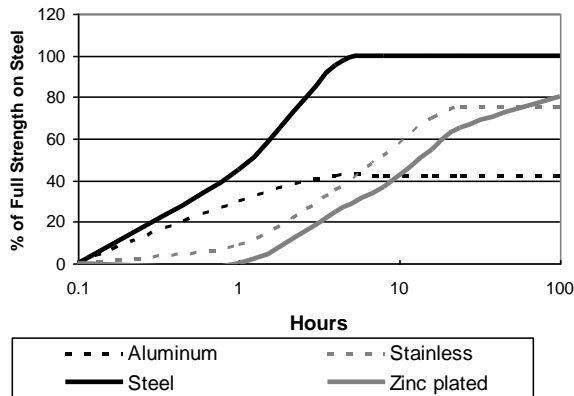


Cure speed vs. temperature

The rate of cure will depend on the ambient temperature. **Full cure** is attainable in 24 hours at room temperature, 22°C (72°F), or 1 hour at 93°C (200°F).

Cure speed vs. activator

To shorten cure time or if an inactive surface is present, applying a primer (Surface Prep) to the surface will improve cure speed. A 3/8-16 steel nut and bolt assembly will fixture in 5 minutes using an activator, while fixturing will occur in 20 minutes without an activator. Full cure in 24 hours for both procedures.

Cure Speed vs Activator

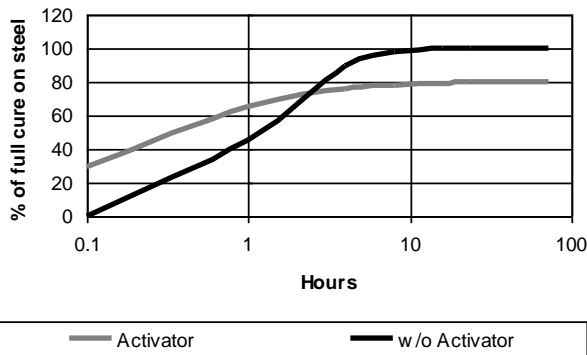

Chemical / Solvent Resistance

Aged under conditions and tested at 22°C(72°F)
% Initial Strength retained after time

Temp	500hr	1000hr
Gasoline 23°C	95%	
Distilled Water 23°C	110%	
Antifreeze 87°C	90%	
Ethanol 23°C	110%	
Acetone 23°C	100%	
Heat Aged 150°C		90%
Motor oil(5W30SL) 125°C		100%

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials. For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

This product is not normally recommended for use on plastics (particularly thermoplastic materials where stress cracking of the plastic could result). It is recommended to confirm compatibility of the product with such substrates.

ORDERING INFORMATION

Part Number	Container Size
C-27250	50 ml bottle

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8 to 28C (46 to 82F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

TYPICAL ENVIRONMENTAL RESISTANCE

DISCLAIMER: Cyclo Industries, Inc. provides the information contained herein in good faith but makes no representation as to its comprehensiveness or accuracy. Individuals receiving this information must exercise their independent judgment in determining its appropriateness for a particular purpose. Cyclo Industries, Inc. makes no representations or warranties, either expressed or implied, of merchantability, fitness for a particular purpose with respect to the information set forth herein or to the product to which the information refers. Accordingly, Cyclo Industries, Inc. will not be responsible for damages resulting from use of or reliance upon this information.