



# TECHNICAL DATA

Heavy Duty - Industrial Grade


## DRY MOLY LUBRICANT

Stock No. C-3322

**Withstands 800°F / 427°C**  
**No Pretreatment Needed**

Cyclo® Dry Moly's layered crystals fill in metal imperfections, giving super resistance to high temperatures. Low shear resistance provides long lasting lubricity. Crystals chemically bond to metal surfaces making a stronger, harder alloy.

- ▲ Superior Extreme-Pressure Properties
- ▲ Quick Air-Drying
- ▲ Thin Film - .3 to .5 millimeter
- ▲ 800°F Intermittent / 700°F Constant

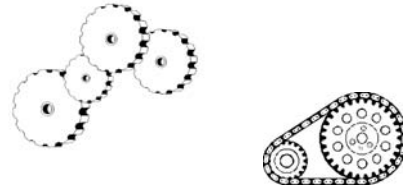

**Directions: SHAKE WELL BEFORE USE.** 1. Clean and dry surfaces to be sprayed. 2. Hold can 8 to 10 inches from surface. 3. Spray a thin, even coat. Allow to air dry for 5-10 minutes before use.

### PHYSICAL PROPERTIES



Size:	10.25 oz.	Cases per Pallet:	114
Package:	Aerosol Can	Cases per Layer:	19
Flash Point:		Layers per Pallet:	6
Specific Gravity (H <sub>2</sub> O=1):		Cube:	0.31
Appearance:		Case Weight:	9.0
Solubility in Water:		UPC on Can:	0 89269 03322 6
Cans Per Case:	12	UPC on Carton:	1 00 89269 03322 3