

HEAVY DUTY

DRY MOLY

Dry lubricant with extreme-pressure properties.


Layered crystals chemically bond to metal surfaces to fill in imperfections for low shear resistance to provide long-lasting lubricity. Spray reaches into cracks & corners.

- Superior extreme-pressure properties
- Thin film: .3 to .5 millimeter
- Removable with solvent
- No pretreatment needed
- Quick air-drying
- Withstands 800°F / 427°C intermittent, 700°F / 371°C constant
- Does not attract dust
- Adheres to all types of metals

For use on sliding surfaces & gears, bushings, bearings, conveyors, chutes, lock mechanisms, high-pressure gear drives, automotive/industrial gaskets, run-in of new or rebuilt parts, vending machines and parking meters.

C-3322 | 12 Pack | 10.25 oz / 291 g

For Over
50 Years
The Choice of
Professionals

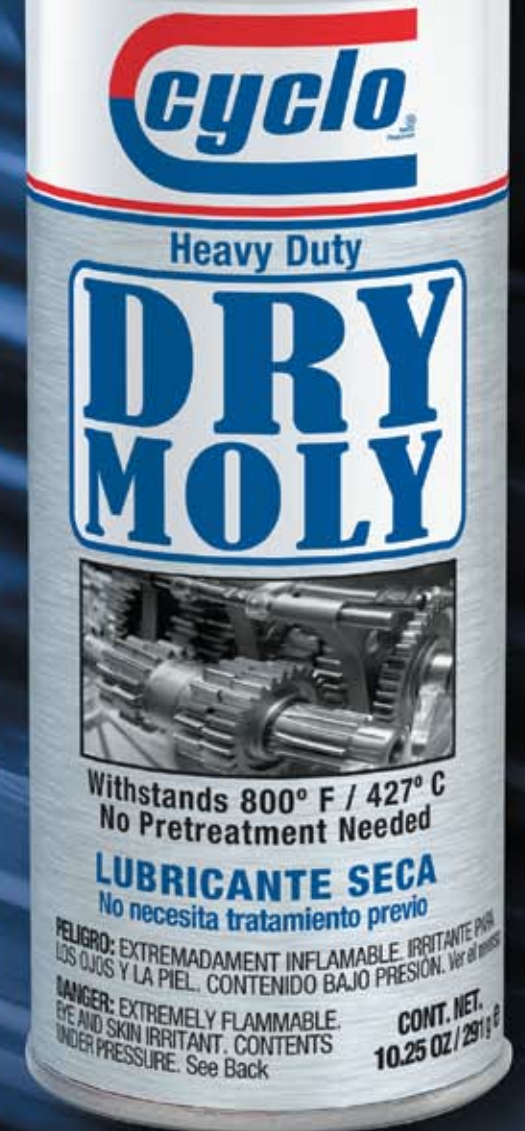

Another quality product from:
CYCLO INDUSTRIES, INC
401 Maplewood Dr, #18
Jupiter, FL 33458 USA
www.cyclo.com

Toll Free: 800-843-7813
Phone: 561-775-9600
Fax: 561-622-1055
email: cyclo@cyclo.com



form #: 0822
© 2008 Cyclo Industries, Inc.

DISTRIBUTED BY: